

Jan 24, 2023

FarmBot Use Instructions

DOI

<https://dx.doi.org/10.17504/protocols.io.x54v9d76zg3e/v1>



Mia Ruppel¹, Sven K Nelson², Grace Sidberry¹, Madison Mitchell¹, Daniel Kick³, Shawn K. Thomas¹, Katherine E. Guill¹, Melvin J. Oliver¹, Jacob D. Washburn³

¹University of Missouri; ²Heliponix, LLC; ³USDA-ARS



Madi Mitchell

University of Missouri

Create & collaborate more with a free account

Edit and publish protocols, collaborate in communities, share insights through comments, and track progress with run records.

Create free account

OPEN  ACCESS



DOI: <https://dx.doi.org/10.17504/protocols.io.x54v9d76zg3e/v1>

Protocol Citation: Mia Ruppel, Sven K Nelson, Grace Sidberry, Madison Mitchell, Daniel Kick, Shawn K. Thomas, Katherine E. Guill, Melvin J. Oliver, Jacob D. Washburn 2023. FarmBot Use Instructions. **protocols.io**

<https://dx.doi.org/10.17504/protocols.io.x54v9d76zg3e/v1>

License: This is an open access protocol distributed under the terms of the **Creative Commons Attribution License**, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited

Protocol status: Working

We use this protocol and it's working

Created: January 05, 2023

Last Modified: January 24, 2023

Protocol Integer ID: 74822

Keywords: farmbot use instruction, farmbot use instructions this protocol, rootbot system, instruction

Funders Acknowledgements:

United States Department of Agriculture - Agricultural Research Service

Abstract

This protocol contains instructions for setting up and running the RootBot system.

Software Set Up

- 1 **Installation:** Go to <https://software.farm.bot/v12/FarmBot-OS/farmbot-os.html#installation> for instructions on how to install FarmBot OS
- 2 **Configuration:** Go to <https://software.farm.bot/v12/FarmBot-OS/farmbot-os/configurator.html> for instructions on how to configure FarmBot for specific needs
- 3 **Using the Farm Bot Web app:** In the installation and configuration process, you will have created a web app account for FarmBot with credentials that you can use to login into the site




Building Commands (For first time setup only)

- 4 Once the FarmBot software is setup and running with your RootBot you will need to create the basic commands needed for the RootBot to pickup, move, image, and replace the soil plates. These commands will be slightly different depending on the customization of your rootbot and require some trial and error to determine the exact X,Y, and Z coordinates based on your machine.
After logging in, there is a main interface showing the manual controls for the robot and a representative image that corresponds to the inside of the machine
- 5 To build the sequence needed to move the plates and take photos of the roots, click on the 'sequence' tab on the topmost toolbar pictured with the numbered boxes.



- 6 The choice to add sequences should show up as a plus button

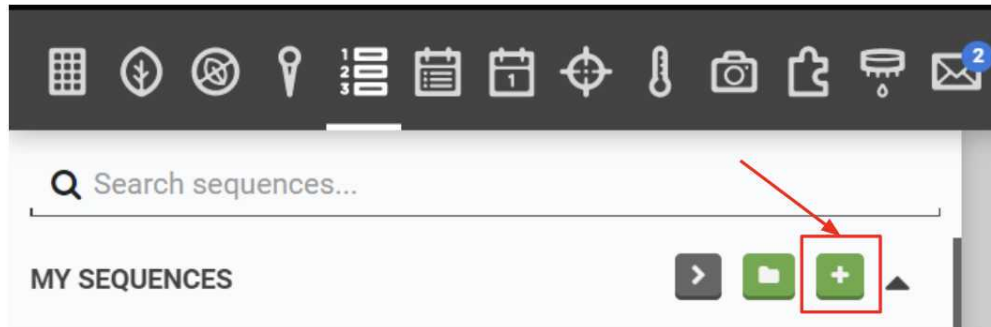

- 7 The sequence of commands for each slot you desire to use in the rootbot will consist of six main steps: 1) a MOVE TO command directing the gantry to the specific slot in the rootbot, 2) a PICK UP PLATE (RELATIVE VERSION) command instructing the RootBot on how to pick up the plate from the slot, 3) a TAKE PHOTO OF ROOTS command moving the plate to the camera and cueing the camera Pi to take the image, 4) a second MOVE TO command moving the plate back to the slot it came from, 5) a RETURN PLATE TO SLOT (RELATIVE VERSION) command putting the plate back in its slot, and 6) and SEND MESSAGE command, which is optional but recommended for monitoring and troubleshooting purposes.

[A9] Pick up, Photo, Return

DESCRIPTION

VARIABLES (0)

SEQUENCE STEPS (6)

MOVE TO

A9 (348, 0, -314)

Options

X-OFFSET	Y-OFFSET	Z-OFFSET	SPEED (%)
10	3	42	100

PICK UP PLATE (RELATIVE VERSION)

Options

TAKE PHOTO OF ROOTS

Options

MOVE TO

A9 (348, 0, -314)

Options

X-OFFSET	Y-OFFSET	Z-OFFSET	SPEED (%)
-20	3	310	60

RETURN PLATE TO SLOT (RELATIVE VELOCITY)

Options

SEND MESSAGE

Options

MESSAGE

RootBot has just finished photographing the plate in slot position A9.

TICKER NOTIFICATION

TYPE

Success

TOAST POP UP

EMAIL

SPEAK

Example Pick up, Photo, Return command



- 7.1 The MOVE TO commands consist of a number values directing the RootBot gantry to a specific location. An example can be seen in the image above but the exact values will vary depending on the design of the system.
- 7.2 The PICK UP PLATE (RELATIVE VERSION) command is a custom command consisting of a series of MOVE RELATIVE commands. This command can be created and saved once and then re-used for each new slot you program.

←

Pick up plate (relative version)










RUN

SAVED ✓

DESCRIPTION

VARIABLES (0)

SEQUENCE STEPS (8)

MOVE RELATIVE

?







X (MM)

Y (MM)

Z (MM)

SPEED (%)

0

0

-42

100

MOVE RELATIVE

?







X (MM)

Y (MM)

Z (MM)

SPEED (%)

-12

0

0

100

MOVE RELATIVE

?







X (MM)

Y (MM)

Z (MM)

SPEED (%)

0

0

30

100

MOVE RELATIVE

?







X (MM)

Y (MM)

Z (MM)

SPEED (%)

2

0

0

100

MOVE RELATIVE

?







X (MM)

Y (MM)

Z (MM)

SPEED (%)

-2

0

0

100

MOVE RELATIVE

?







X (MM)

Y (MM)

Z (MM)

SPEED (%)

0

0

215

100

MOVE RELATIVE

?







X (MM)

Y (MM)

Z (MM)

SPEED (%)

-18

0

0

100

MOVE RELATIVE

?







X (MM)	Y (MM)	Z (MM)	SPEED (%)
0	0	65	100

Example plate pickup command

- 7.3 The TAKE PHOTO OF ROOTS command is another complex command that consists of moving the plate to the photo position, sending an audio signal to the camera Pi, waiting for 18,000 milliseconds to ensure enough time for the image to be taken, and moving the plate back to its slot position.

← Take photo of roots

↶ 🗑️ 📁 👁️ ⭐ ⚙️ RUN SAVED ✓

DESCRIPTION ▼

VARIABLES (0) + ▲

SEQUENCE STEPS (4) ▲

MOVE PLATE INTO PHOTO POSITION
🔗 ? 🗑️ 📁 ⬆️

SEND AUDIO SIGNAL
🔗 ? 🗑️ 📁 ⬆️

WAIT
? 🗑️ 📁 ⬆️

TIME IN MILLISECONDS
18000

MOVE PLATE OUT OF PHOTO POSITION
🔗 ? 🗑️ 📁 ⬆️

←

Move plate into photo position

↶

🗑️

📄

🔍

⚙️

RUN

SAVED ✓

DESCRIPTION ▾

VARIABLES (0)

+

 ▲

SEQUENCE STEPS (3) ▲

MOVE TO

?

🗑️

📄

↑

+

Plate b6 (photo slot) (230, 290, -314) ▾

Options

⌵

X-OFFSET

Y-OFFSET

Z-OFFSET

SPEED (%)

-22

0

310

100

+

MOVE TO

?

🗑️

📄

↑

+

Plate b6 (photo slot) (230, 290, -314) ▾

Options

⌵

X-OFFSET

Y-OFFSET

Z-OFFSET

SPEED (%)

-22

0

256

100

+

MOVE TO

?

🗑️

📄

↑

+

Plate b6 (photo slot) (230, 290, -314) ▾

Options

⌵

X-OFFSET

Y-OFFSET

Z-OFFSET

SPEED (%)

0

0

256

100

+

← Send audio signal

↶ 🗑️ 📄 🔍 ⚙️

RUN

SAVED ✓

DESCRIPTION ▼

VARIABLES (0) + ▲

SEQUENCE STEPS (1) ▲

SEND MESSAGE ? 🗑️ 📄 ⬆️ +

MESSAGE

Trigger image capture.

TYPE

Info ▼

TICKER NOTIFICATION ☒

TOAST POP UP ☒

EMAIL ☐

SPEAK ☒

protocols.io | <https://dx.doi.org/10.17504/protocols.io.x54v9d76zg3e/v1>

January 23, 2023

10/18

← Move plate out of photo position

↶ 🗑️ 📄 🖨️ ⚙️ RUN SAVED ✓

DESCRIPTION ▼

VARIABLES (0) + ▲

SEQUENCE STEPS (2) ▲

MOVE TO ? 🗑️ 📄 ⬆️ +

Plate b6 (photo slot) (230, 290, -314) ▼ Options ⌵

X-OFFSET	Y-OFFSET	Z-OFFSET	SPEED (%)
-20	0	256	100

MOVE TO ? 🗑️ 📄 ⬆️ +

Plate b6 (photo slot) (230, 290, -314) ▼ Options ⌵

X-OFFSET	Y-OFFSET	Z-OFFSET	SPEED (%)
-20	0	310	100

- 7.4 The RETURN PLATE TO SLOTE (RELATIVE VERSION) command is the last complex command of the series and consists of several relative move commands bring the plate back to it original location.

Return plate to slot (relative vers...

↶
↷
🗑️
📄
🔍
⚙️
RUN
SAVED ✓

DESCRIPTION

VARIABLES (0)

SEQUENCE STEPS (5)

MOVE RELATIVE
?
🗑️
📄
⬆️
⬆️

X (MM)	Y (MM)	Z (MM)	SPEED (%)
0	0	-54	100

MOVE RELATIVE
?
🗑️
📄
⬆️
⬆️

X (MM)	Y (MM)	Z (MM)	SPEED (%)
22	0	0	100

MOVE RELATIVE
?
🗑️
📄
⬆️
⬆️

X (MM)	Y (MM)	Z (MM)	SPEED (%)
0	0	-256	100

MOVE RELATIVE
?
🗑️
📄
⬆️
⬆️

X (MM)	Y (MM)	Z (MM)	SPEED (%)
10	0	0	100

MOVE RELATIVE
?
🗑️
📄
⬆️
⬆️

X (MM)	Y (MM)	Z (MM)	SPEED (%)
0	0	42	100


- 8 These commands need to be setup for each slot in the RootBot, however once they are setup and saved they can be easily used through the scheduling interface described next.

Scheduling Image Times


- 9 Before starting an experiment, check the connectivity of the FarmBot web app to ensure it is online. You can look at this by clicking on the button that says **connectivity**




- 9.1 This should bring up a diagram showing the status of your computer's connection and FarmBot's connection to the Raspberry Pi in the gantry system. Every part of the chain should have a green checkmark by it meaning it's connected. if there are connectivity issues, it'll show up red with an 'x' instead.

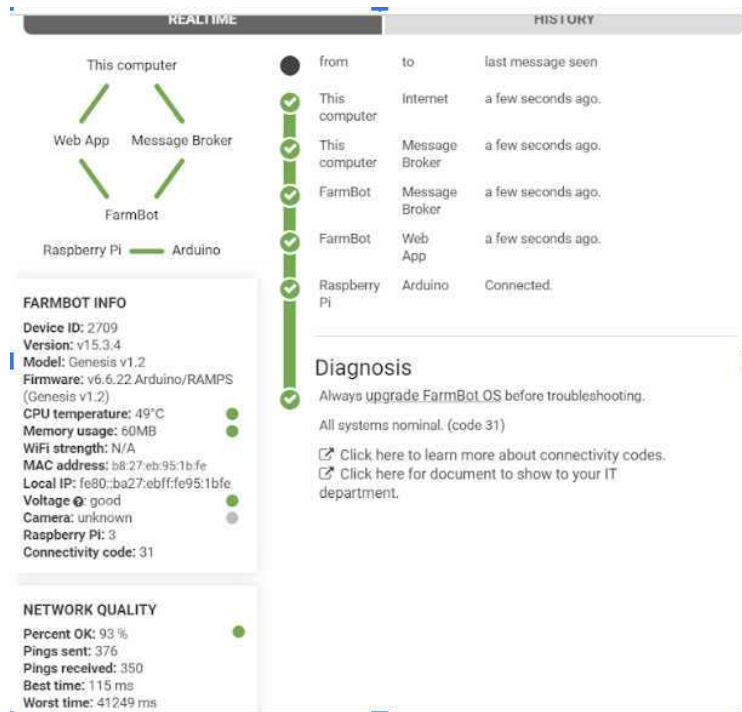


- 10 After connectivity has been ensured, go back to the manual controls on the main interface. At the beginning of each experiment, the 'find home' button needs to be pressed so the gentry has a home point to orient itself.

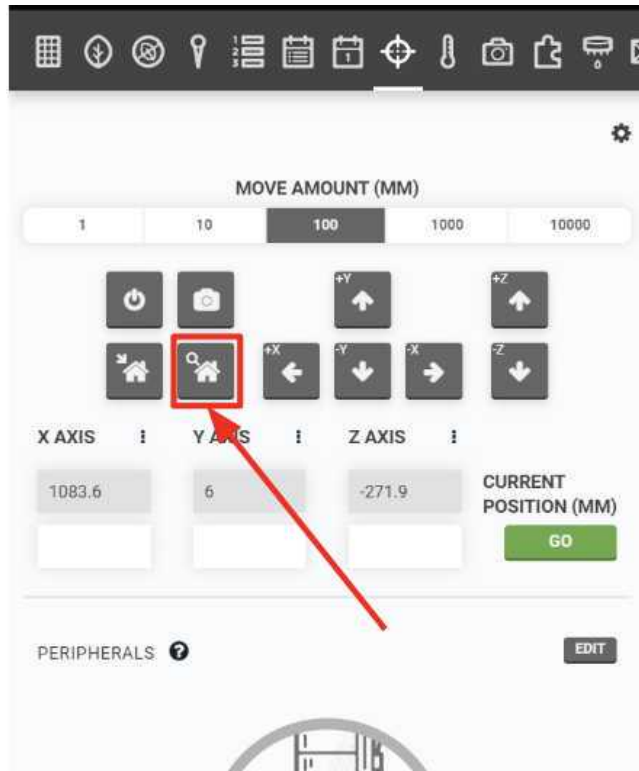

- 11 Once the gantry has found the homepoint, it's time to start scheduling events for when the plates should be picked up and photographed. At the top, there's a long toolbar with many tabs. The one pictured with a mini calendar is the 'events' tab.



- 12 Pressing on the events tab will bring up a menu with a plus button that when clicked allows the user to add events.

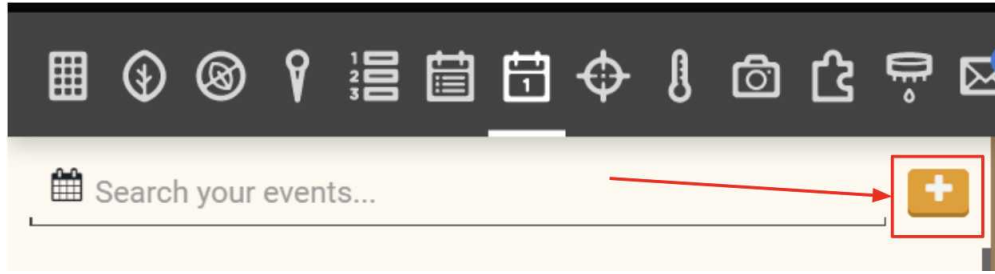

- 13 Once the plus button is clicked, another menu pops up where specifications of the sequence to run on the plates in each slot and when are chosen

- 13.1 Here's an example of what an event could look like:

Add event

SEQUENCE OR REGIMEN
[A28] Pick up, Photo, Return

STARTS
12/15/2022 10:23 AM

☒ **REPEATS?**

EVERY
6 Hours

UNTIL
12/17/2022 11:23 AM

SAVE *

- 13.2 Once the time specifications are correct, the event can be saved and will be added to the list of upcoming events that can be seen whenever the events tab is opened.



2022	
Dec 15	
11:44am	[A1] Pick up, Photo, Return
11:47am	[A3] Pick up, Photo, Return
11:50am	[A5] Pick up, Photo, Return
11:53am	[A8] Pick up, Photo, Return
11:57am	[A14] Pick up, Photo, Return
12:01pm	[A16] Pick up, Photo, Return
12:05pm	[A18] Pick up, Photo, Return copy 1
12:09pm	[A20] Pick up, Photo, Return copy 1
12:13pm	[A22] Pick up, Photo, Return copy 1
12:17pm	[A24] Pick up, Photo, Return copy 1

Loading plates into the RootBot

- 14 Since the soil plates have live emerging roots in them care must be taken to prevent light exposure. The plates can be kept under a thick dark cloth, box or other means while being transported to the RootBot and carefully placed into their slot while still covered.
- 15 It is important that the plates line up exactly with the RootBot Gantry system's hook to ensure successful pickup. We have found that the best way to do this is to run the initial scheduled pickup and photo of the roots right after placing them in the RootBot and monitor/guide the first pickup of each plate. This can be done by opening the RootBot door and making sure the hooks line up at the beginning of each pickup, then closing the door quickly before the plate comes out of the slot to minimize any light exposure. Once each plate has been successfully picked up once the RootBot will place it back in the exact spot so that it is picked up correctly the next time automatically.