

Oct 16, 2019

Version 1

Creating Differential Transcript Expression Results with DESeq2 V.1

 In 1 collection

DOI

dx.doi.org/10.17504/protocols.io.799hr96

David A Eccles¹

¹Malaghan Institute of Medical Research (NZ)



David A Eccles

GrinGene Bioinformatics

Create & collaborate more with a free account

Edit and publish protocols, collaborate in communities, share insights through comments, and track progress with run records.

Create free account

OPEN  ACCESS



DOI: <https://dx.doi.org/10.17504/protocols.io.799hr96>

Protocol Citation: David A Eccles 2019. Creating Differential Transcript Expression Results with DESeq2. **protocols.io**
<https://dx.doi.org/10.17504/protocols.io.799hr96>

License: This is an open access protocol distributed under the terms of the **Creative Commons Attribution License**, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited

Protocol status: In development

We are still developing and optimizing this protocol



Created: October 15, 2019

Last Modified: October 16, 2019

Protocol Integer ID: 28705

Keywords: DESeq2, nanopore, transcript, DE, expression, differential expression analysis of transcript count table, creating differential transcript expression, differential transcript expression, transcript count table, differential expression analysis

Abstract

Differential expression analysis of transcript count tables using DESeq2

Guidelines

Note: this is a demonstrative experimental protocol for a specific differential expression analysis; variables, file names and some other code will need to be changed for your own circumstances

Troubleshooting

Before start

You should have gene-annotated transcript count tables for multiple sequencing libraries, renamed to match the form of "<library_identifier>_wide_transcript_counts_LAST.csv". See [here](#) for how to create these tables from nanopore cDNA transcripts.

You should also have a sample metadata file that matches library/barcode pairs to experimental conditions, with at least "SampleID" and "Label" fields. The SampleID field should be of the form "<library_identifier>.BCXX"; this will be replaced by the "Label" field when results are output to a file.

Collating count data

- 1 Combine the transcript count data into a single data structure. To reduce confusion when this protocol is run multiple times, we declare an *analysisDate* variable to be used for output file names:

```
countDate <- format(Sys.Date(), "%Y-%b-%d");
```

We also load libraries that will be used in the protocol:

```
## steps 1-2
library(dplyr);      # data table manipulation
library(tidyr);      # data table cleaning
library(readr);      # reading csv files into tbl
library(magrittr);   # additional pipe operators
## steps 3-8
library(DESeq2);     # differential expression analysis
library(ashr);        # for log fold change shrinking
## step 9
options(java.parameters = "-Xmx10G"); # may be needed to avoid
Excel errors
library(xlsx);        # writing to an Excel file
```

- 1.1 Collect a list of the count data files:

```
data.files <- list.files(pattern =
"_wide_transcript_counts_LAST.csv$");
names(data.files) <-
sub("_wide_transcript_counts_LAST.csv$", "", data.files);
```

CHECK - print out the file names to make sure they're correct:

```
data.files
```

```
## example output
#                               CGAug18_004
#"CGAug18_004_wide_transcript_counts_LAST.csv"
#                               CGDec17
#    "CGDec17_wide_transcript_counts_LAST.csv"
#                               CGJan19_006
#"CGJan19_006_wide_transcript_counts_LAST.csv"
#                               CGMar19_009
#"CGMar19_009_wide_transcript_counts_LAST.csv"
#                               CGNov18_005
#"CGNov18_005_wide_transcript_counts_LAST.csv"
```

1.2 Set up the skeleton structures for creating the combined table. This is created in two parts:

1. A gene lookup table, containing gene metadata
2. A count table, containing transcript counts

```
geneLookup.tbl <- NULL;
counts.raw.tbl <- tibble(tdir=character());
```

1.3 The skeleton structures are then populated with the data from individual library files:

```
for(dfi in seq_along(data.files)){
  data.files[dfi] %>%
    read_csv %>%
    mutate(tdir = paste0(transcript, "_", dir)) ->
      counts.sub.tbl;
  ## append columns without barcode names to gene table
  geneLookup.tbl %<>%
    rbind(select(counts.sub.tbl,
                  -starts_with("BC"),
                  -starts_with("RB")));
  ## append columns *with* barcode names to count table
  counts.sub.tbl %<>%
    select("tdir", starts_with("BC"), starts_with("RB"));
  ## add file label to barcode name column
  bcCols <- grep("^(BC|RB)", colnames(counts.sub.tbl));
  colnames(counts.sub.tbl)[bcCols] %<>%
    paste0(names(data.files)[dfi], ".", .);
  counts.raw.tbl %<>%
    full_join(counts.sub.tbl, by="tdir");
}
## Remove duplicates from the gene table
geneLookup.tbl %<>% unique;
```

CHECK - make sure that the column headings of the aggregated count table match the expected names:

```
colnames(counts.raw.tbl)

## Example output
# [1] "tdir" "CGAug18_004.BC04" "CGAug18_004.BC05"
"CGAug18_004.BC06"
# [5] "CGDec17.BC06" "CGDec17.BC07" "CGJan19_006.BC03"
"CGJan19_006.BC04"
# [9] "CGJan19_006.BC05" "CGJan19_006.BC06" "CGJan19_006.BC07"
"CGJan19_006.BC08"
#[13] "CGMar19_009.BC07" "CGMar19_009.BC08" "CGMar19_009.BC09"
"CGMar19_009.BC10"
#[17] "CGNov18_005.BC01" "CGNov18_005.BC02" "CGNov18_005.BC03"
"CGNov18_005.BC04"
#[21] "CGNov18_005.BC05" "CGNov18_005.BC06"
```

2 Do some cleaning / reordering of the data, then create an intermediate aggregate count table

2.1 The sample metadata file is read in, mostly as factors; the sample ID is converted to a character vector:

```
read.csv("metadata.csv") %>%  
  mutate(SampleID = as.character(SampleID)) ->  
  meta.df;
```

Metadata rows are subset and re-ordered to match the order of the count table:

```
meta.df <- meta.df[match(colnames(counts.raw.tbl)[-1],  
  meta.df$SampleID),];
```

2.2 Missing values for genes are set to counts of zero, and the count table is appended to the genes table:

```
counts.raw.tbl %>%  
  replace(is.na(.), 0) %>%  
  left_join(geneLookup.tbl, ., by="tdir") ->  
  counts.withGenes.tbl;
```

2.3 The combined table is output to an intermediate file, using the analysis date as a file name:

```
counts.withGenes.tbl %>%  
  write_csv(sprintf("raw_counts_%s.csv", countDate));
```

Differential Expression

3 Set up variables to change output file names and behaviour:

Note: the countDate is not "today" because different explorations of differential expression could be done on the same count data.

```
countDate <- "2019-Oct-16"; # date of count aggregation
l2FCShrink <- TRUE; # whether the Log2FC values should be shrunk
analysisDate <- format(Sys.Date(), "%Y-%b-%d"); # date of DESeq
analysis
resultSource <- "GRCm38_CG_4T1"; # descriptive label for results
excluded.factors <- "Treatment"; # factors to exclude from
statistical model
```

Read in the intermediate aggregated count file and the metadata file:

```
sprintf("raw_counts_%s.csv", countDate) %>%
  read_csv ->
  count.tbl;

read.csv("metadata.csv") %>%
  mutate(SampleID = as.character(SampleID)) %>%
  ## Make sure metadata information only includes samples in the
  count table
  filter(SampleID %in% colnames(count.tbl)) ->
  meta.df;
```

- 4 Carry out metadata filtering (i.e. sample exclusion) and count filtering (e.g. gene / sample QC)

- 4.1 Filter the metadata table to only include the desired samples:

Note: this step will be situation specific

```
meta.df %<>%
  ## Only keep 4T1 strain data
  filter(Strain == "4T1") %>%
  ## Sort by cell line, then replicate
  arrange(Line, Replicate);
```

- 4.2 Make sure the count table containing only genes with a total count across all samples of at least *minCount*, have at least *nonZeroThreshold* genes with nonzero counts, and filter

to choose only Sample IDs that are in the metadata table:

```
count.tbl %<>%
  pivot_longer(cols=c(-transcript, -Chr, -Strand, -Start, -End,
                     -Description, -Gene, -dir, -tdir),
               names_to = "SampleID", values_to = "count") %>%
  ## only keep transcripts with a total count of 2 or more
  group_by(SampleID) %>%
  filter(sum(count) >= 2) %>%
  filter(sum(count > 0) > (length(count) * 0.25)) %>%
  ## convert to integer
  mutate(count = as.integer(count)) %>%
  ## restore wide format
  ungroup %>%
  pivot_wider(names_from = SampleID, values_from = count) %>%
  ## reorder to match metadata table
  select(transcript, Chr, Strand, Start, End, Description, Gene,
         dir, tdir,
         match(meta.df$SampleID, colnames(.)))
```

- 4.3 Filter the metadata file to match the count table (i.e. removing any samples filtered out in the previous step), and exclude any columns that have single values:

Refactor the metadata structure to remove missing values:

```
for(x in colnames(meta.df)){
  if(is.factor(meta.df[[x]])){
    meta.df[[x]] %<>% factor;
  }
}
```

CHECK - make sure the SampleIDs in the column names match the exact order of the metadata table:


```
colnames(count.tbl)[-(1:9)] == meta.df$SampleID

## Example output
# [1] TRUE TRUE TRUE TRUE TRUE TRUE TRUE TRUE TRUE TRUE TRUE TRUE
TRUE TRUE TRUE
#[16] TRUE TRUE
```

5 Create DESeq2 data structure, and run a differential expression analysis

5.1 Identify factors for the statistical model from the metadata file:

```
setdiff(colnames(metasub.df),
        c(c("SampleID", "Label", "Replicate", "Notes"),
          excluded.factors)) ->
  factorNames;
```

5.2 Create the transcript count matrix:

```
count.mat <- as.matrix(count.tbl[-(1:9)]);
rownames(count.mat) <- count.tbl$tdir;
```

5.3 Convert to DESeq2 structure and run DESeq2:

```
DESeqDataSetFromMatrix(count.mat, meta.df,
                        as.formula(paste0("~ ", paste(factorNames, collapse=" +
")))) %>%
  DESeq ->
  dds;
```


CHECK - make sure dispersion and result names look reasonable:

Note: The result names will not indicate every possible comparison; just a subset from which all comparisons can be derived from.

```
plotDispEsts(dds);
resultsNames(dds);

## Example output
# [1] "Intercept"                "Experiment_CG0005_vs_CG0004"
# [3] "Experiment_CG0006_vs_CG0004" "Experiment_CG0009_vs_CG0004"
# [5] "Experiment_CGDec17_vs_CG0004" "Line_p0D25_vs_p0"
# [7] "Line_p0SC_vs_p0"          "Line_p0SCL_vs_p0"
# [9] "Line_WT_vs_p0"
```

Expected result

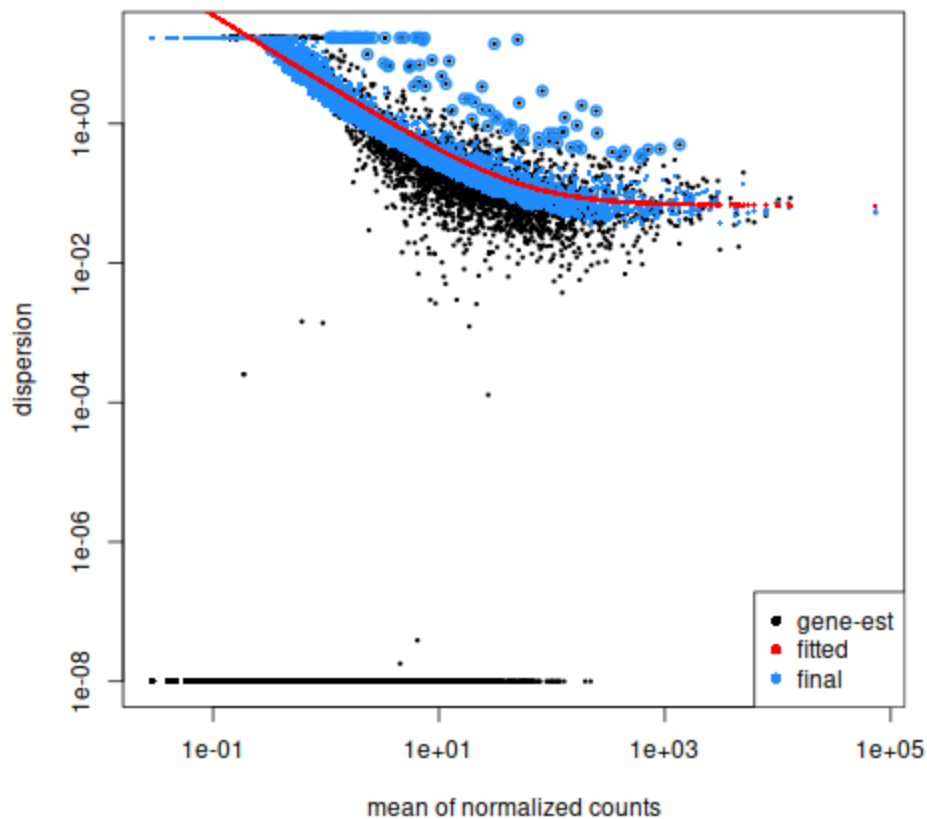

Dispersion plot for nanopore transcript data. Ideally there should be a smooth curve, with higher dispersion for low-count genes, and lower dispersion for high-count genes.

Result Collation

6 Prepare results table skeletons for DESeq2 results

6.1 Collect up comparisons to make:

```
resultList <- NULL;
for(fi in factorNames){
  vn <- unique(meta.df[[fi]]);
  vn <- vn[order(-xtfrm(vn))];
  if(length(vn) == 1){
    next;
  }
  for(fai in seq(1, length(vn)-1)){
    for(fbi in seq(fai+1, length(vn))){
      cat(sprintf("%s: %s vs %s\n", fi, vn[fai], vn[fbi]));
      resultList <- c(resultList,
                      list(c(fi, as.character(vn[fai]),
                           as.character(vn[fbi]))));
    }
  }
}
```

6.2 Create variance-stabilised [log2] count matrix from DESeq2 structure:

```
dds.counts <- assay(vst(dds, blind=FALSE));
```

Rescale VST values to have the same 99th percentile, but a minimum value of zero. This makes the scaled counts resemble more closely the actual read counts:

```
dds.quantile99 <- quantile(dds.counts[dds.counts >
min(dds.counts)], 0.99);
((dds.counts - min(dds.counts)) /
 (dds.quantile99 - min(dds.counts))) * (dds.quantile99) ->
  dds.counts;
```

Replace column names in the VST matrix with labels from the metadata:

Note: the substitution removes any initial whitespace from the label

```
colnames(dds.counts)[match(meta.df$SampleID,
                           colnames(dds.counts))] <-
  paste0("adj.", sub("^ +", "", as.character(meta.df$Label)));
```

6.3 Generate base count table:

```
dds.withCounts.tbl <- count.tbl
## replace column names with metadata labels
colnames(dds.withCounts.tbl)[match(meta.df$SampleID,
                                   colnames(dds.withCounts.tbl))]
<-
  paste0("raw.", sub("^ +", "", as.character(meta.df$Label)));
```

Tack on VST matrix:

```
dds.withCounts.tbl[, colnames(dds.counts)] <- round(dds.counts, 2);
```

Pre-populate with minimum p-value column:

```
dds.withCounts.tbl$min.p.val <- 0;
```

7 Fetch DESeq2 results for each comparison from the DESeq2 data structure and add to the base table:

```
for(rn in resultList){
  print(rn);
  results.df <-
    if(l2FCShrink){
      as.data.frame(lfcShrink(dds, contrast=rn, type =
"ashr"));
    } else {
      as.data.frame(results(dds, contrast=rn));
    }
  results.df$log2FoldChange <- round(results.df$log2FoldChange,
2);
  results.df$pvalue <- signif(results.df$pvalue, 3);
  results.df$padj <- signif(results.df$padj, 3);
  rn.label <- paste(rn, collapse="-");
  results.tbl <- as.tbl(results.df[, c("log2FoldChange",
"lfcSE", "pvalue", "padj")]);
  colnames(results.tbl) <- paste0(c("L2FC.", "lfcSE.", "pval.",
"padj."), rn.label);
  results.tbl$tdir <- rownames(results.df);
  dds.withCounts.tbl <-
    left_join(dds.withCounts.tbl, results.tbl, by="tdir");
}
```

8 Write results out to a CSV file:

```
dds.withCounts.tbl$min.p.val <-

apply(dds.withCounts.tbl[,grep("^padj\\.\\.", colnames(dds.withCounts.
tbl))],
      1, min, na.rm=TRUE);
write.csv(dds.withCounts.tbl, row.names=FALSE,
          gzfile(sprintf("DE_%s_VST_%s_%s.csv.gz",
                        if(l2FCShrink){"shrunk"} else {"orig"},
                        resultSource, analysisDate)));
```

Excel Worksheet Output

9 Separate results and put into an Excel file

Note: this step will be situation specific

9.1 Split out mitochondrial genes:

```
filtered.dds.tbl <- filter(dds.withCounts.tbl, Chr != "MT");  
MT.dds.tbl <- filter(dds.withCounts.tbl, Chr == "MT");
```

9.2 Write split datasets out to the Excel file:

```
write.xlsx2(as.data.frame(filtered.dds.tbl),  
            sprintf("DE_%s_VST_%s_%s.xlsx",  
                    if(l2FCShrink){"shrunk"} else {"orig"},  
                    resultSource, analysisDate),  
            sheetName="Genome Data", row.names=FALSE);  
write.xlsx2(as.data.frame(MT.dds.tbl),  
            sprintf("DE_%s_VST_%s_%s.xlsx",  
                    if(l2FCShrink){"shrunk"} else {"orig"},  
                    resultSource, analysisDate),  
            sheetName="MT Data", append=TRUE, row.names=FALSE);
```

9.3 Add worksheets for differentially-expressed pairs:

```
for(rn in resultList){
  print(rn);
  if(rn[1] == "Experiment"){
    next;
  }
  sheetName <- sprintf("%s; %s vs %s", rn[1], rn[2], rn[3]);
  meta.df <- meta.df[order(meta.df$Line, meta.df$Replicate),];
  cnames <- sub("^
+","",as.character(meta.df$Label[meta.df[[rn[1]]] %in% rn[2:3]]));
  cnames <- c(paste0("raw.",cnames), paste0("adj.",cnames));
  rn.label <- paste(rn, collapse="-");
  res.tbl <- filtered.dds.tbl[,c(colnames(filtered.dds.tbl)
[c(6,7,8)],

cnames,paste0(c("L2FC.", "pval.", "padj."), rn.label))];
  res.tbl <- res.tbl[res.tbl[[paste0("padj.", rn.label)]] <=
0.1,];
  res.tbl <- res.tbl[order(-res.tbl[[paste0("L2FC.",
rn.label)]]),];
  write.xlsx2(as.data.frame(res.tbl),
              sprintf("DE_%s_VST_%s_%s.xlsx",
                      if(l2FCShrink){"shrunk"} else {"orig"},
                      resultSource, analysisDate),
              sheetName=sheetName, append=TRUE, row.names=FALSE);
}
```